




Customer Service

☎ 1-800-618-6798



ASSEMBLY GUIDE

Model: **CFT2018**

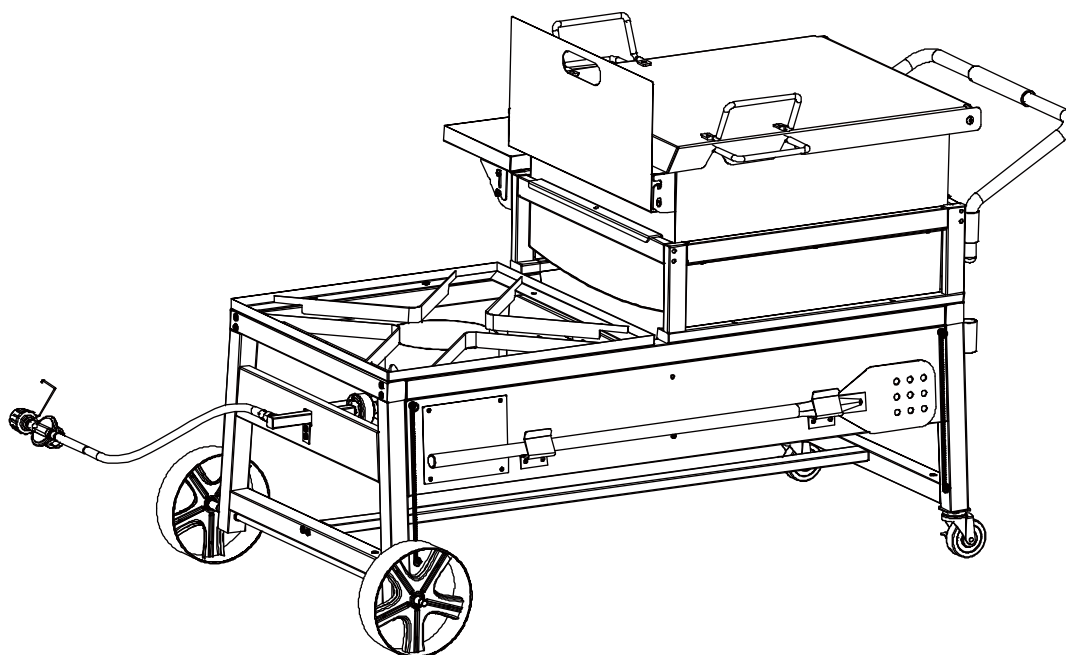

Crawfish Boiler plus Cast iron Burner Cooker Combo

FOR YOUR SAFETY!

Use outdoors only! Do not use it inside a building, garage, or any other enclosed space.

Read the instructions before assembling and using the appliance.

DO NOT use the appliance unless it is completely assembled, and all the parts are securely fastened.

This appliance will become very hot, do not move it during use.

Keep children and pets away.

CONTACT US FIRST!

This appliance has been made to high quality standards.


If you have any questions that are not addressed in this Owner's Manual, or you need parts, please call our customer service hotline or send an email to service@creolefeast.com

Please keep this Owner's Manual for future reference.

Learn more at:











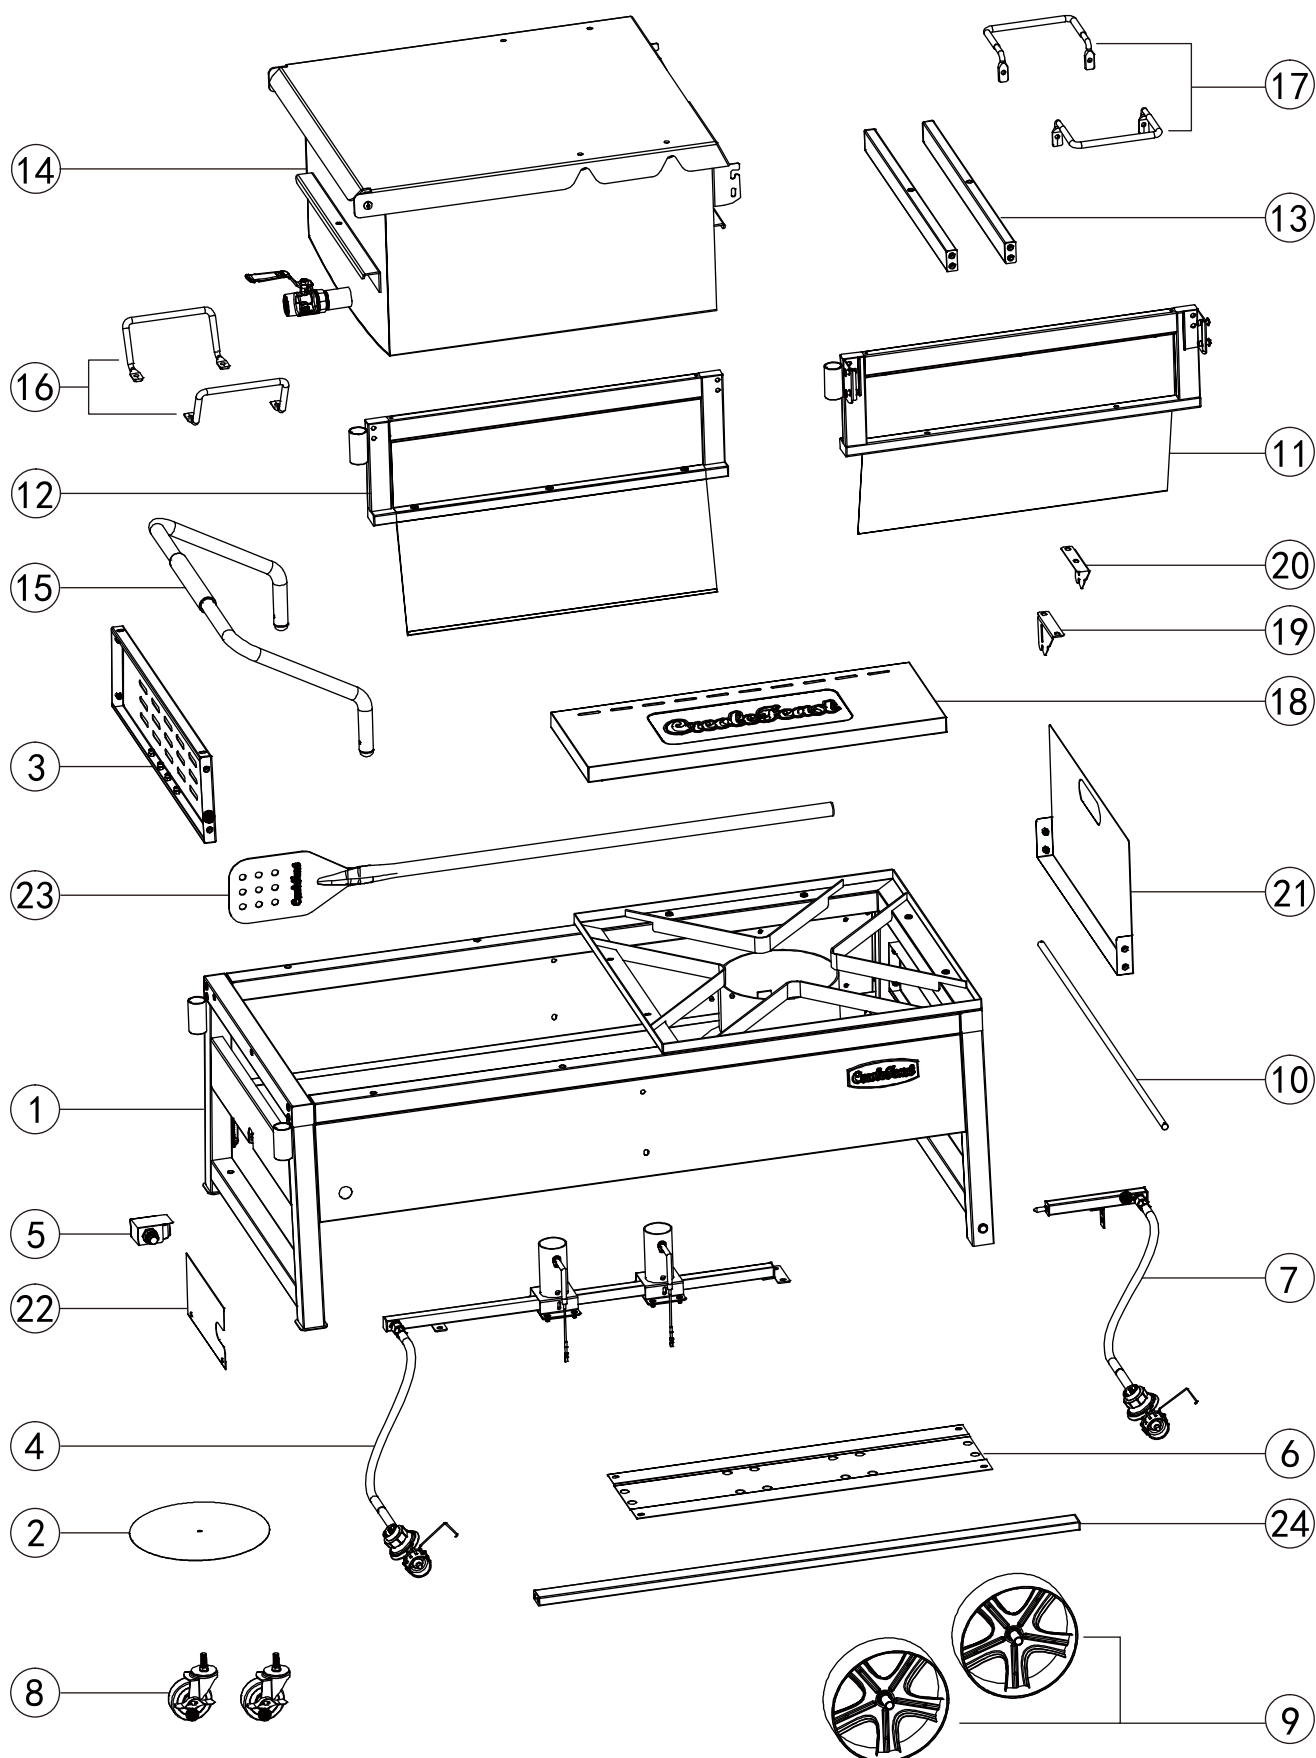













www.creolefeast.com





















Parts and Hardware List

Greale
Feast®

Ref	Description	Illustration	QTY	Ref	Description	Illustration	QTY
1.	Main Body ZH-CFT2018004		1	13.	Tube support-Boiler H-CFT2018030		2
2.	Heat Shield Z-CFT2018057		1	14.	Boiler body ZH-CFT2018002 ZH-CFT2018003 ZH-CFT2018001		1
3.	Mid Panel Z-CFT2018037		1	15.	Side handle W-CFT2018001 W-62920007		1
4.	Burner ZH-CFT2018009		1	16.	Lid handle W-CFB02001		2
5.	Ignitor DQ404+EGRB-DHQ		1	17.	Lift handle W-CFT2018010		2
6.	Base Plate Z-CFT2018038		1	18.	Front table Z-CFT2018060		1
7.	Fryer Regulator Kit ZH-CFT2018010		1	19.	Bracket-Left Z-A1C12004		1
8.	Caster wheel W-CFT2018022		2	20.	Bracket-Right Z-A1C12005		1
9.	Steel Wheel W-CFB02017		2	21.	Divide Panel ZH-CFT2018007		1
10.	Wheel axle W-CFT2018015		1	22.	Heat Plate Z-CFT2018055		1
11.	Front panel-Boiler ZH-CFT2018028		1	23.	Paddle W-CFT2018017		1
12.	Back panel-Boiler ZH-CFT2018029		1	24.	Bottom beam H-CFT2018026		1

A	M6x15	24 pcs	B	M6x35	12 pcs	C	Split pin	2 pcs	D	Spacer	2 pcs	E	M6x55	4 pcs
														
F	M6x15	8 pcs	G	M6	4 pcs	H	M6	8 pcs	I	M6	1 pc			
														

Preparation

Before beginning assembly, make sure all parts are present. Compare parts with packaged contents list and diagram above. If any parts are missing or damaged, do not attempt to assemble the products. Contact customer service for replacement parts via telephone or email.



Phillips screwdriver



Wrench



- Estimated assembly time: 40 minutes
- Tools required for assembly:
Phillips screwdriver (not included) and Wrench (not included)
- Note: The right and left sides of the boiler are designed as if you are facing the front of the boiler.




CALIFORNIA PROPOSITION 65 WARNING

This product can expose you to chemicals including lead which is known to the State of California to cause cancer and birth defects or other reproductive harm.


For more information, go to: www.P65Warnings.ca.gov

1 I   ×1

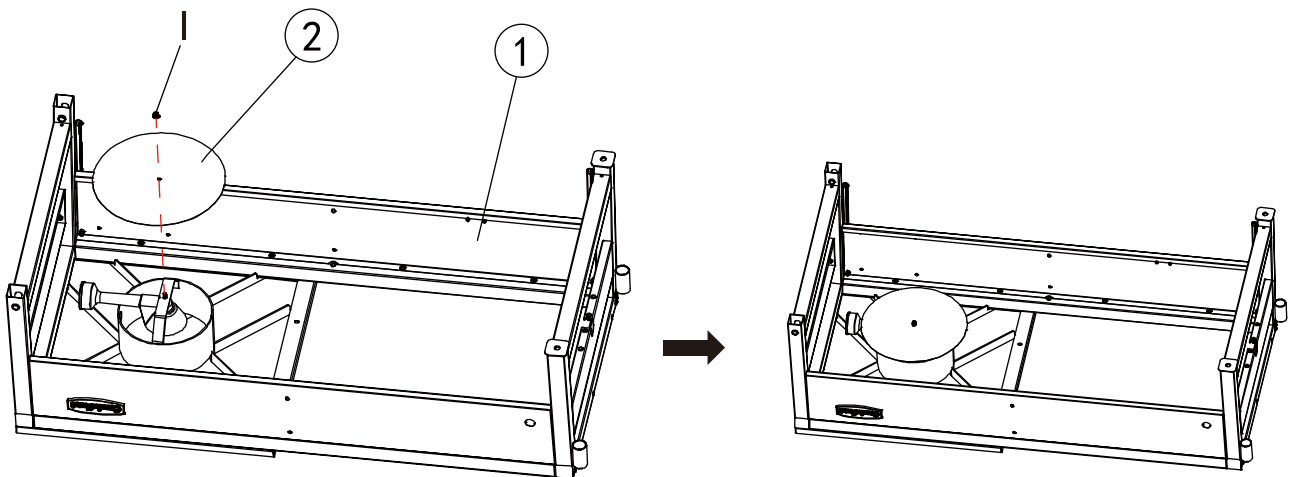


Turn main body (1) upside down on cardboard or nonabrasive surface.
Insert the heat shield (2) to the fryer burner with a bolt (I).

2 A   ×6

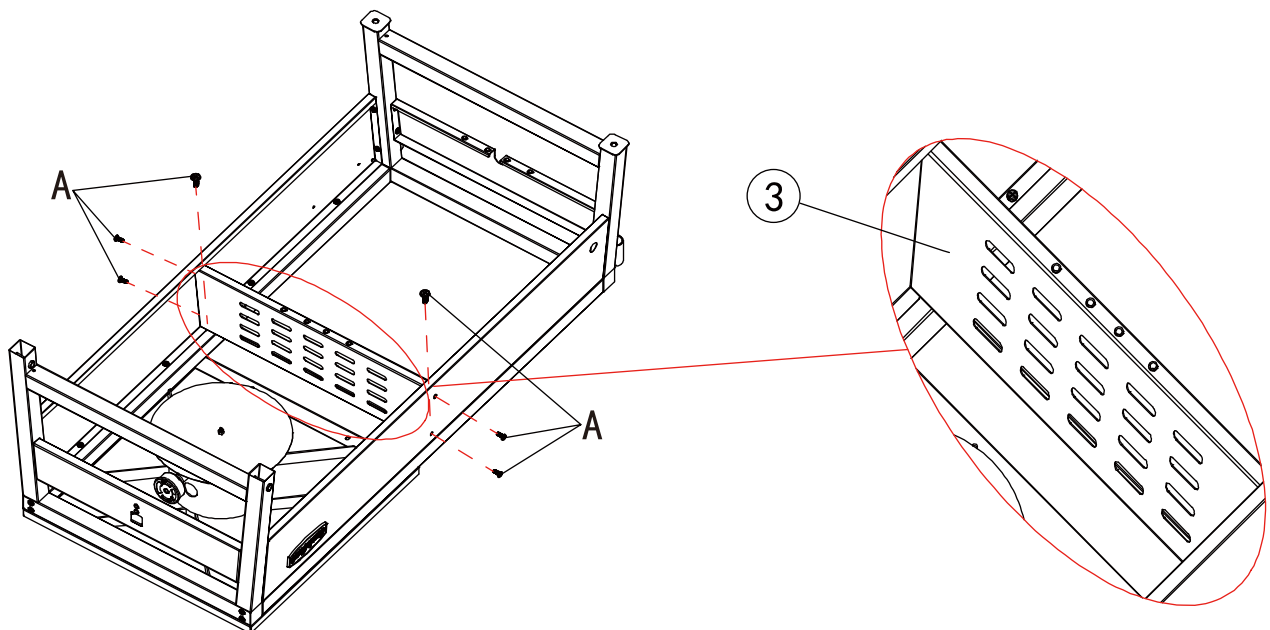


Insert the mid panel (3) to the main body (1) with 6 bolts (A).

3 **A**   **×4**

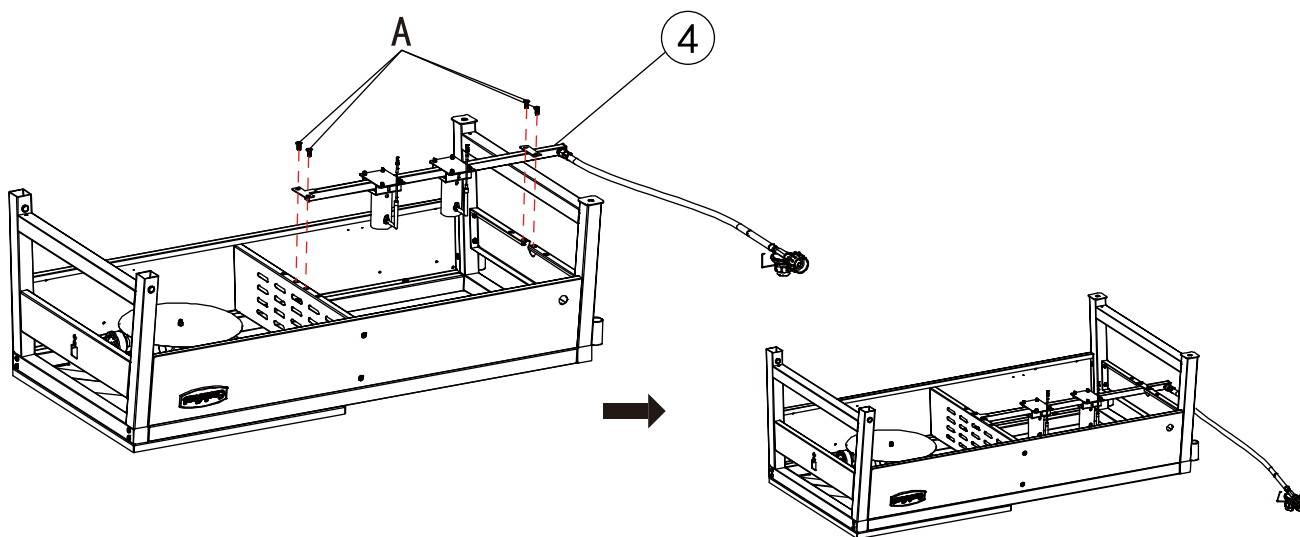


Install the burner (4) to the main body with 4 bolts (A) as shown.

4

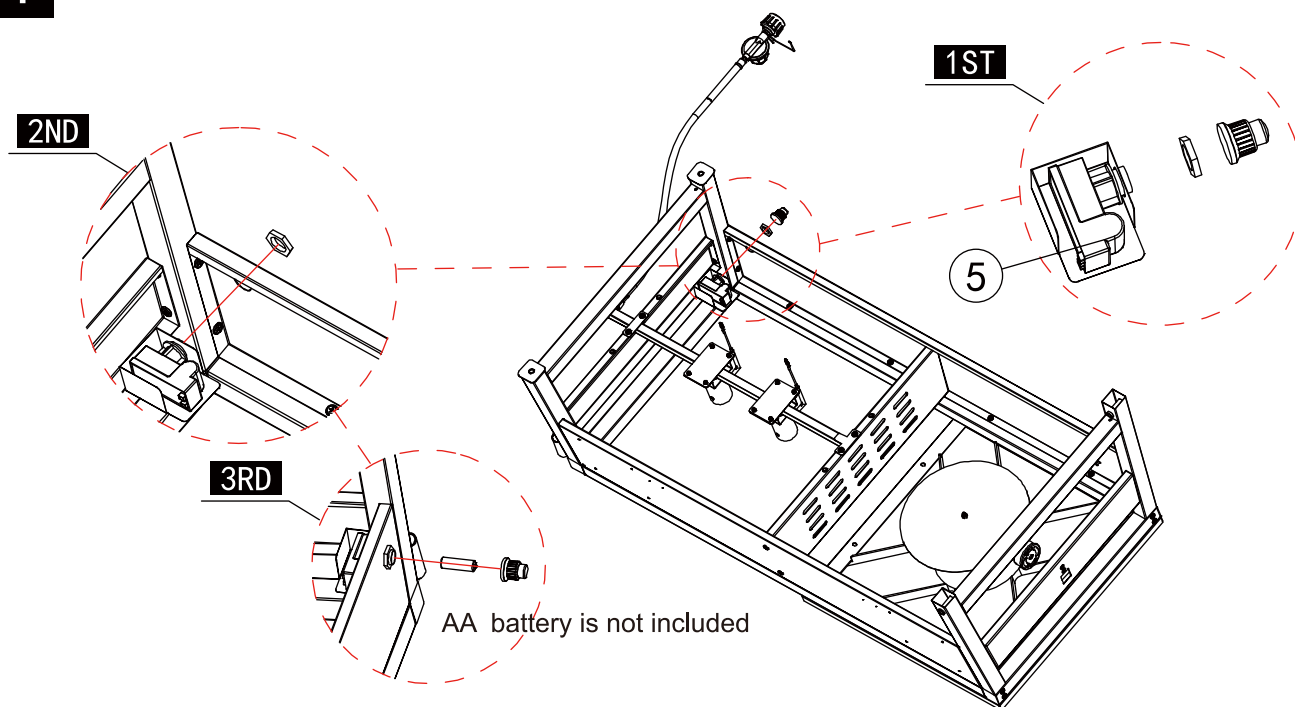


1. Open the preassembly ignitor cap and nut as IMAGE 1.
2. Insert the ignitor to the cart front panel and fixed by nut as IMAGE 2 .
3. Install AA battery into the ignitor with positive facing up as IMAGE 3.

5

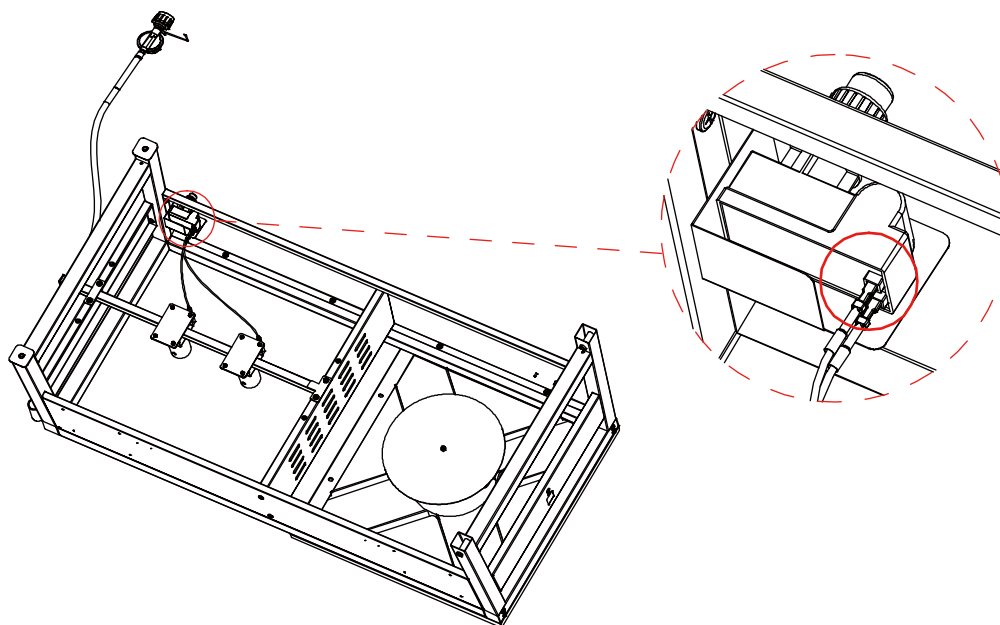


Insert the electrode wire to ignitor.

6

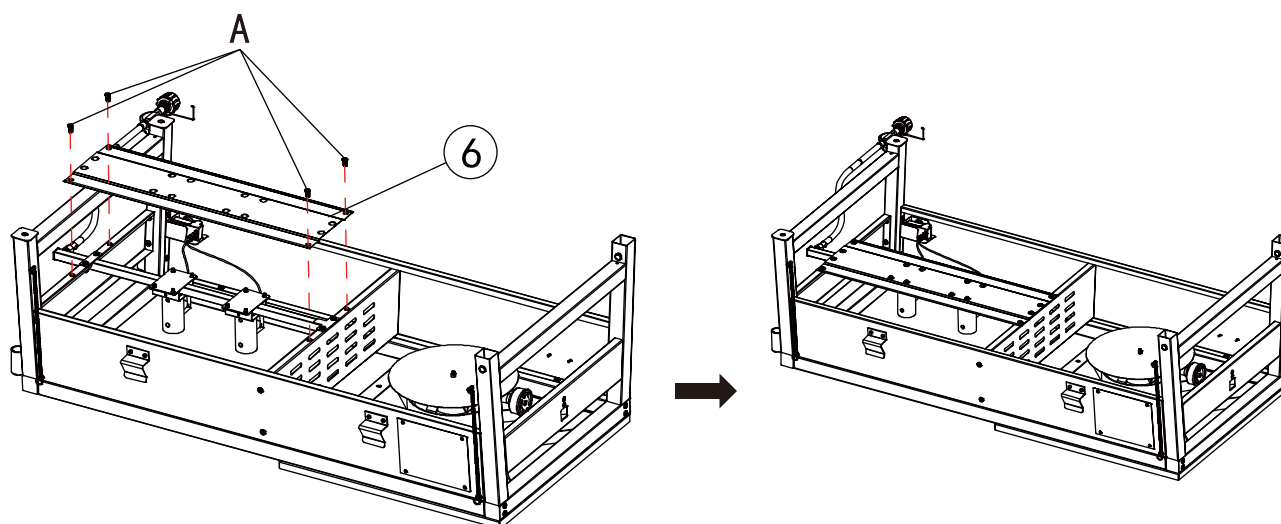




Install the base plate (6) onto the cart with 4 bolts (A).

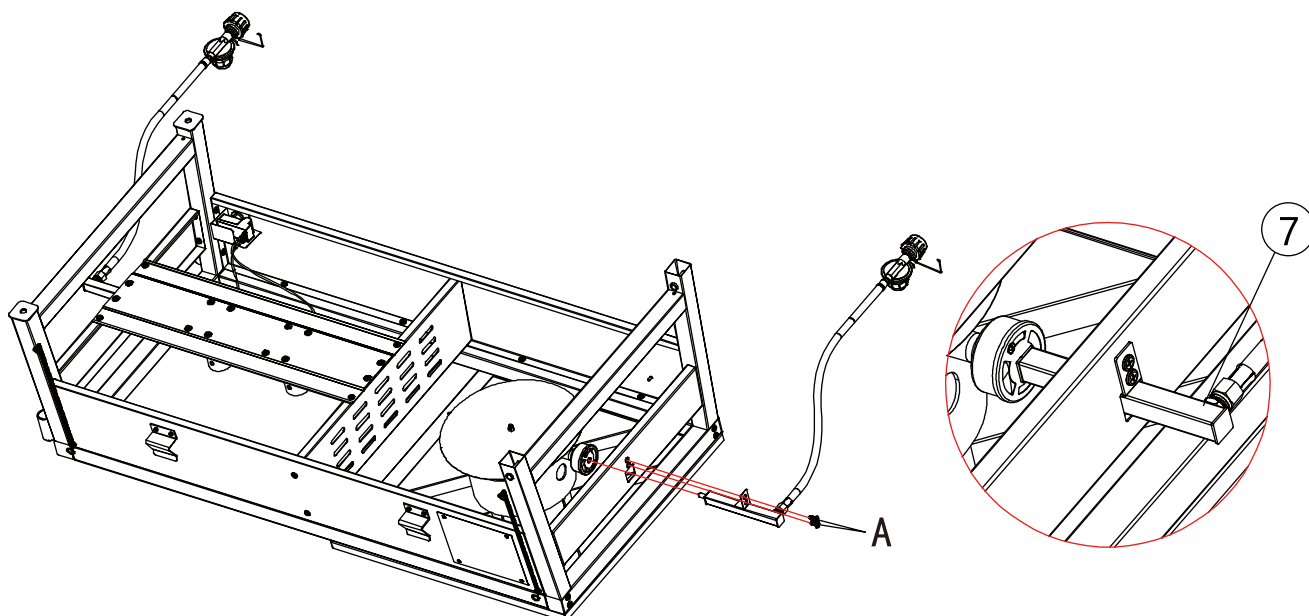7	A		×2
---	---	---	----






Connect the fryer regulator kit (7) to fryer burner with 2 bolts (A).

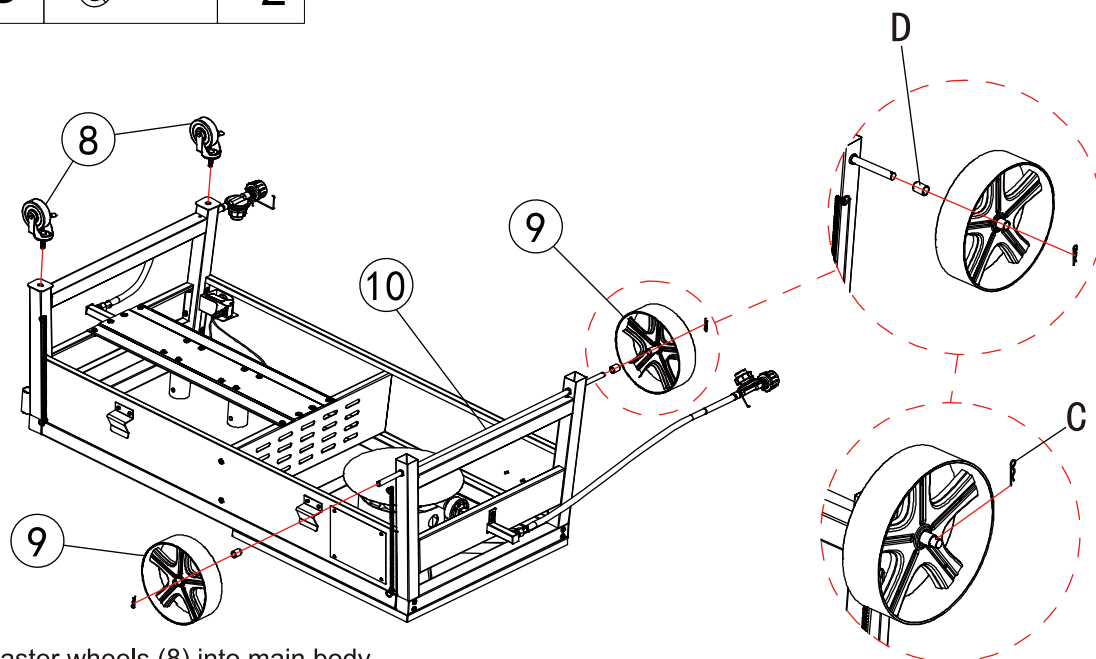8	D		×2
	C		×2




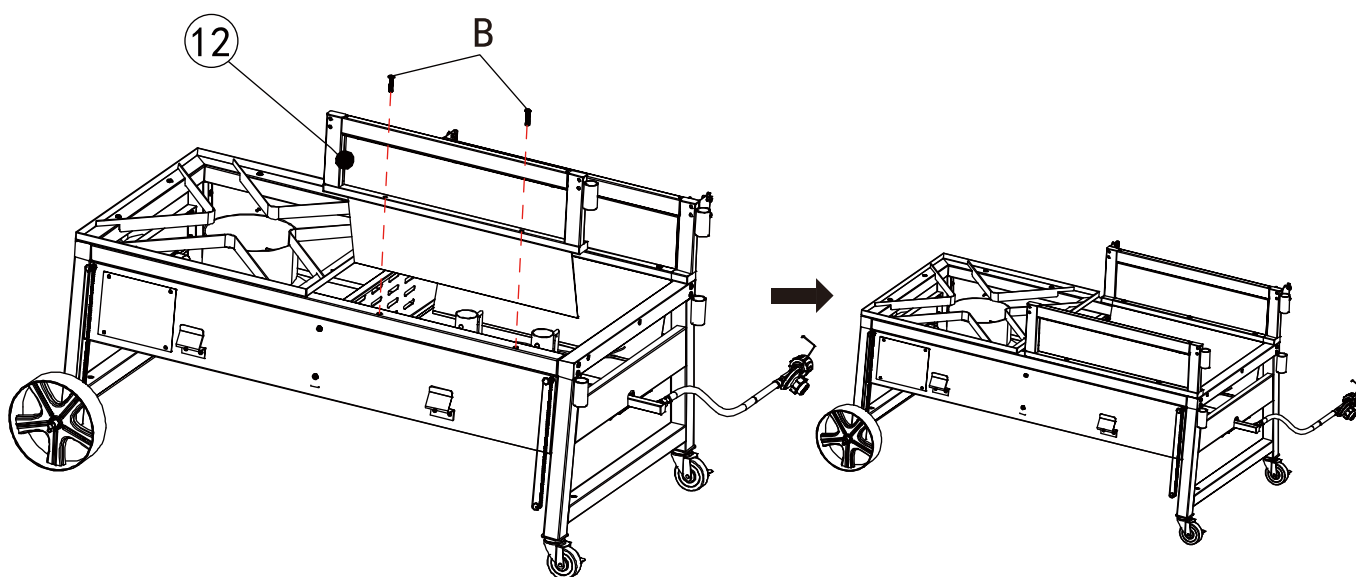
Install the caster wheels (8) into main body.
 Slide the wheel axle (10) through body as IMAGE 4.
 Slide the spacers (D) prior to installing the steel wheels (9).
 Secure wheels by inserting the split pins (C) on axle.

9 B   ×2

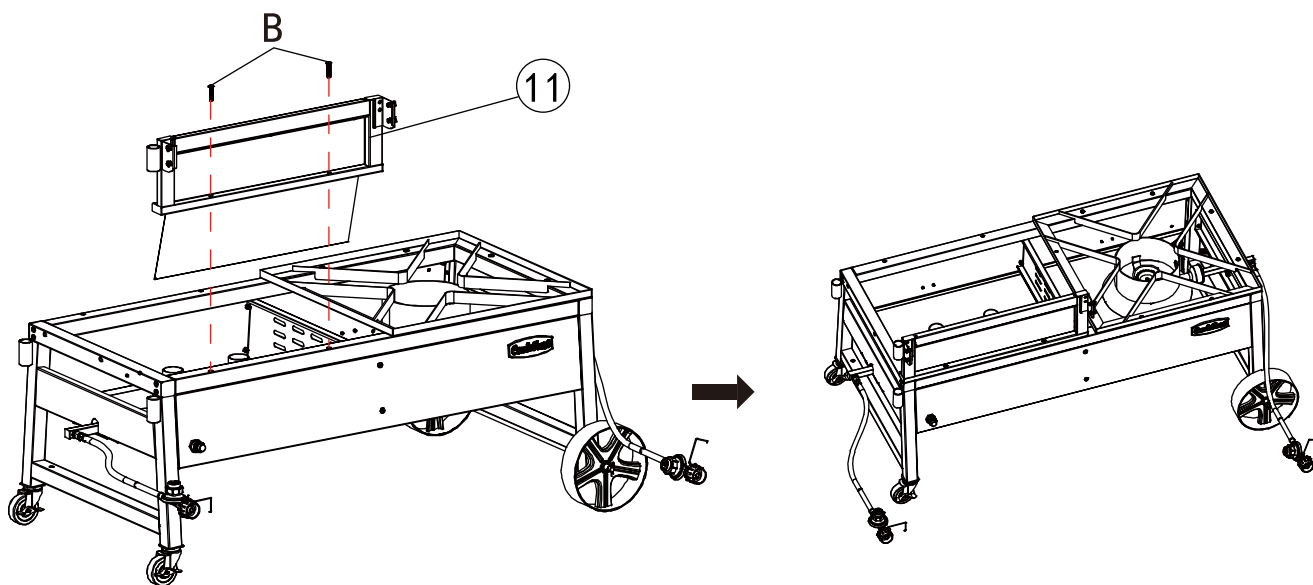


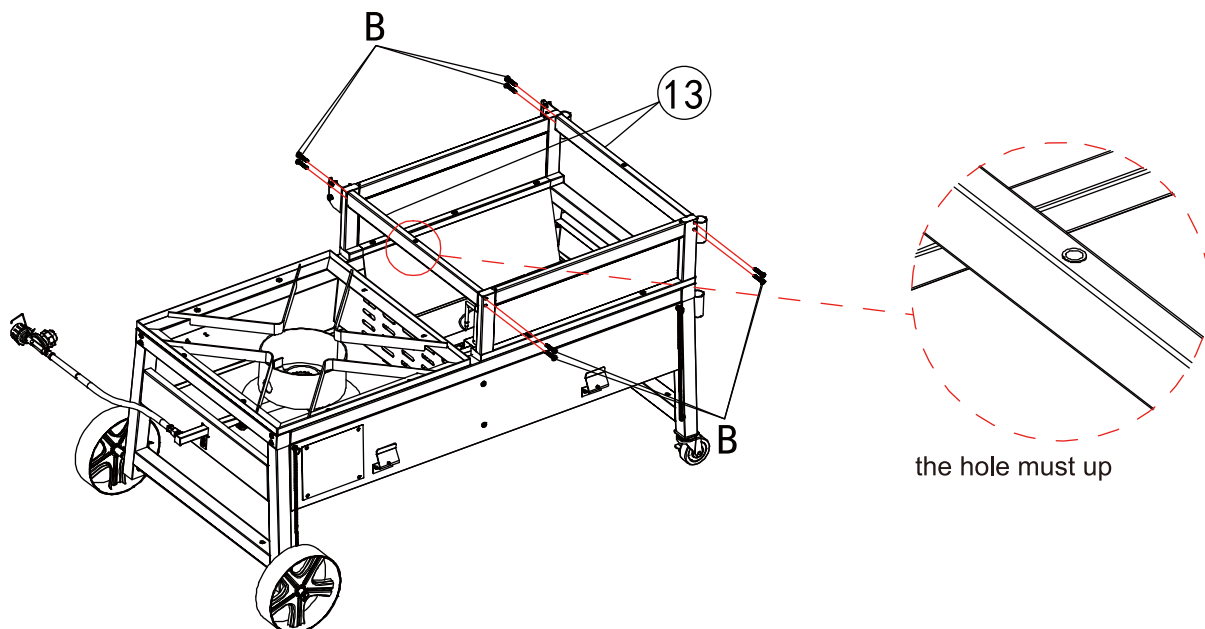
Turn over the main body.
Install the front panel - boiler (11) to main body with 2 bolts (B) as shown.

10 B   ×2




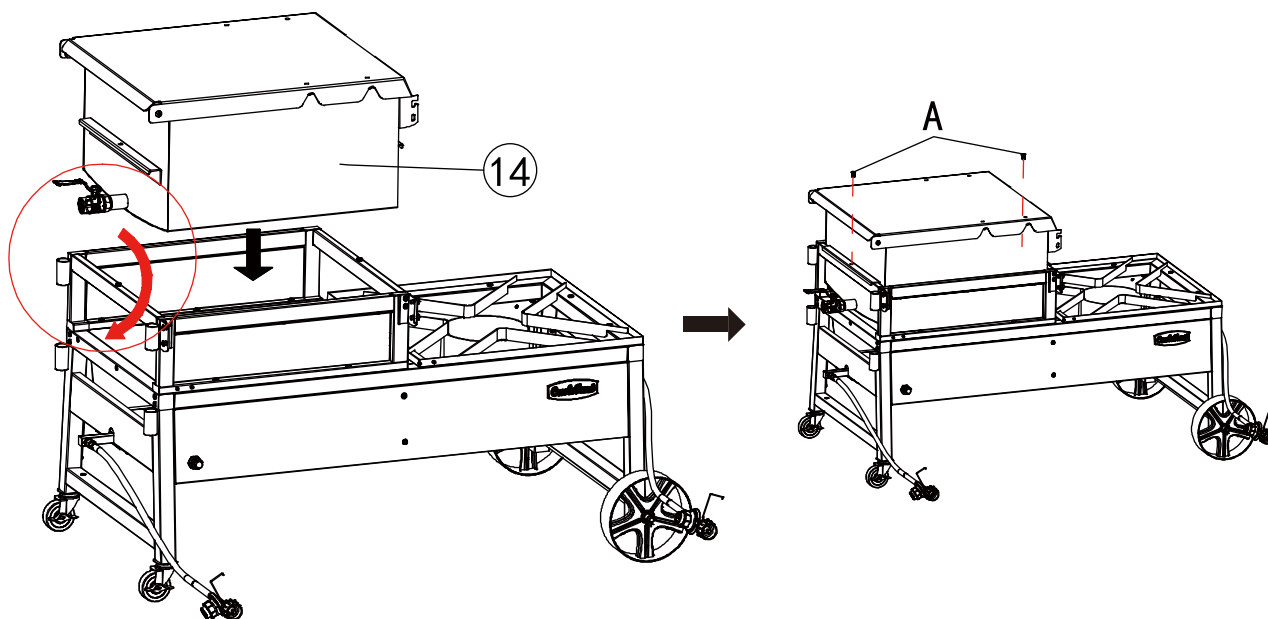
Install the back panel - boiler (12) to main body and secure it with 2 bolts (B).

11 B   ×8




Install the tube support - boilers (13) onto cart with 8 bolts (B) as shown.

12 A   ×2





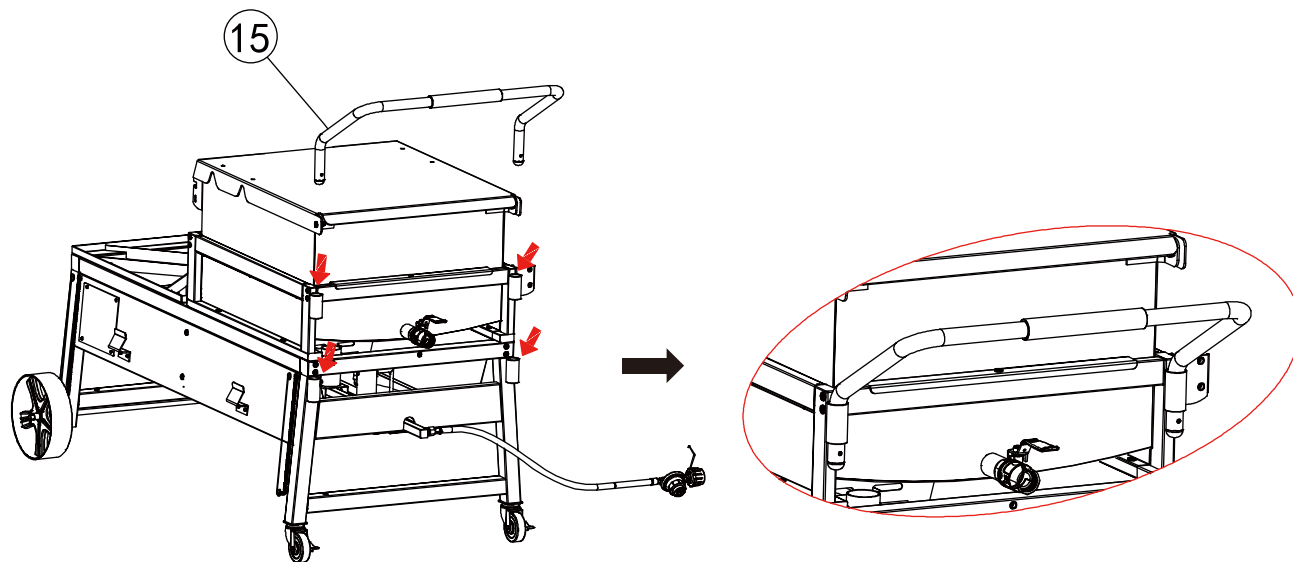

Put in the drain valve as the arrow indicates, and then put the whole boiler body (14) into the cart with 2 bolts (A) .


13





Insert the side handle (15) to upper position for transportation, and lower position for dumping.


14

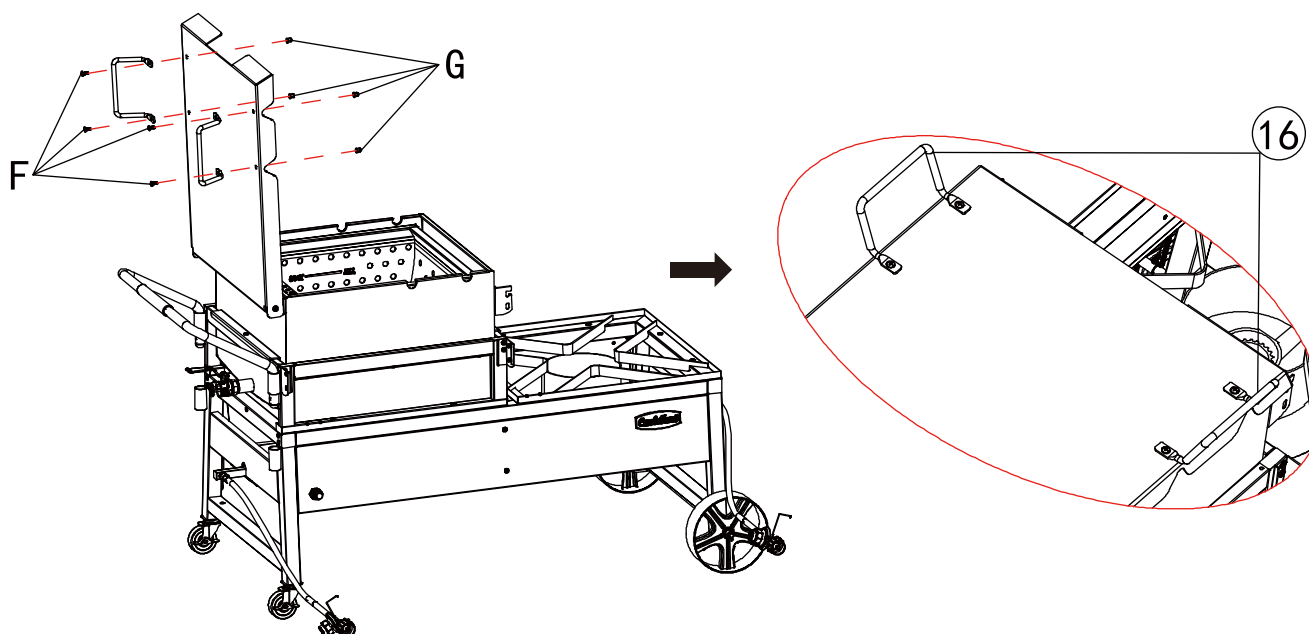F			×4
G			×4




Install the lid handles (16) to the lid with 4 bolts (F) and 4 nuts (G).

15 F   ×4

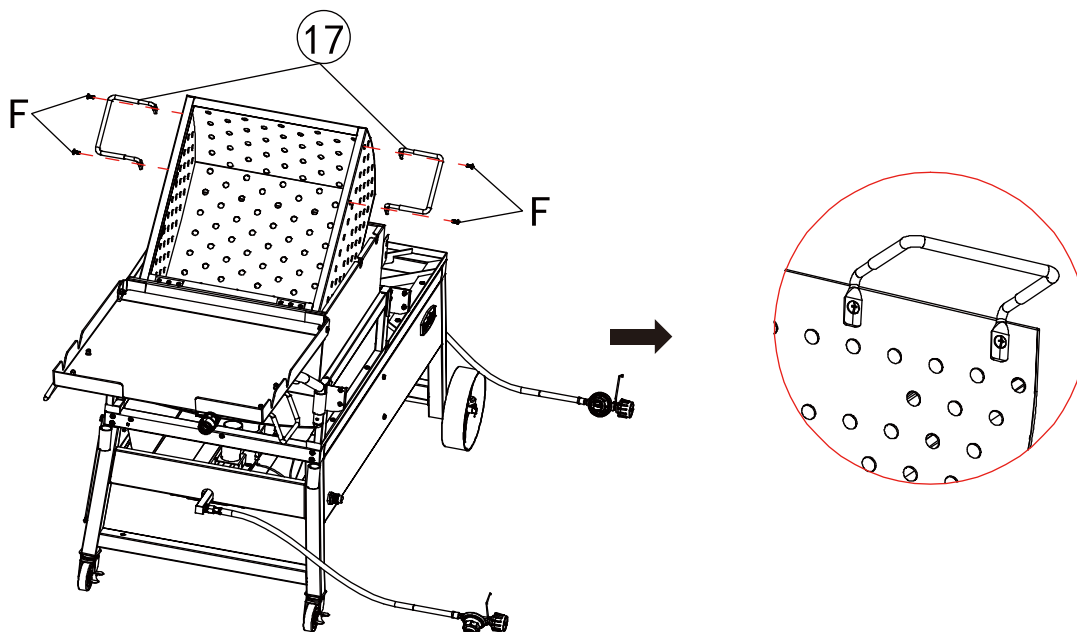





Install lift handles (17) to the basket with 4 bolts (F).

16 A   ×4

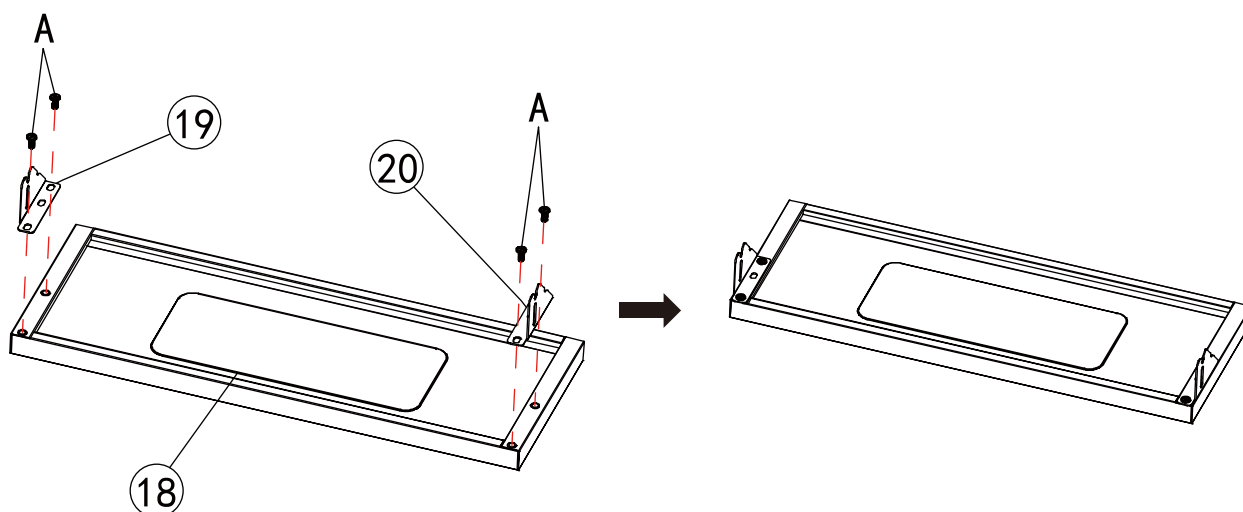





Install the bracket - left (19) and bracket - right (20) to the front table (18) with 4 bolts (A).

17 H   ×4

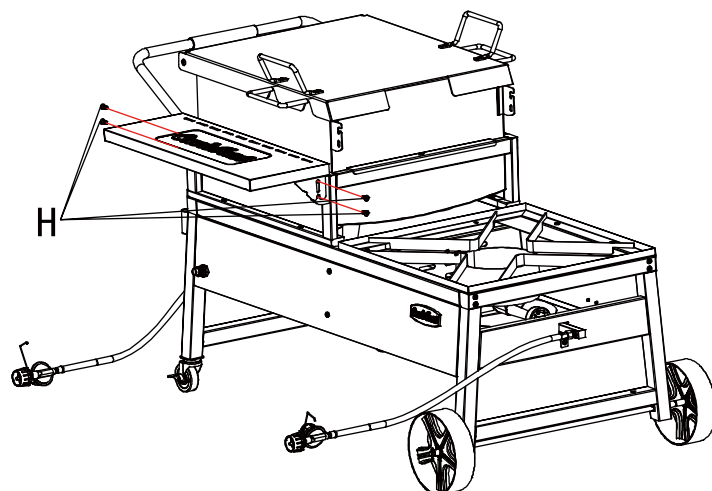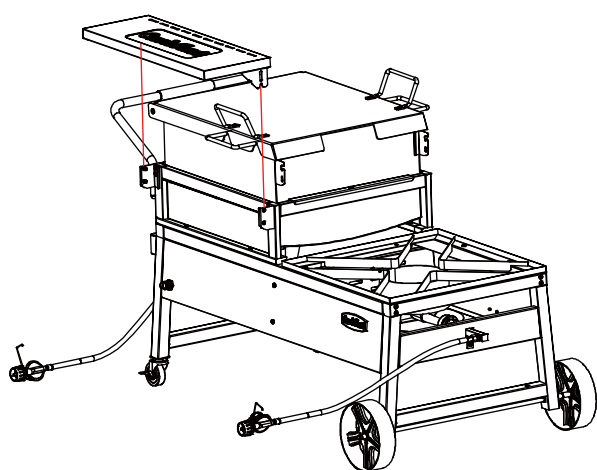


Install the front table (18) to the cart with 4 bolts (H).

18 H   ×4

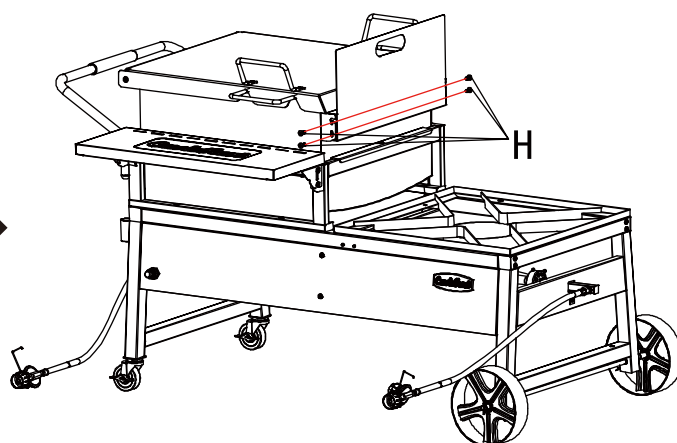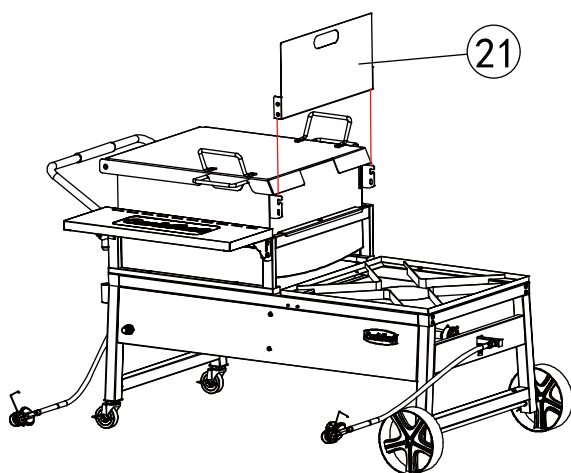


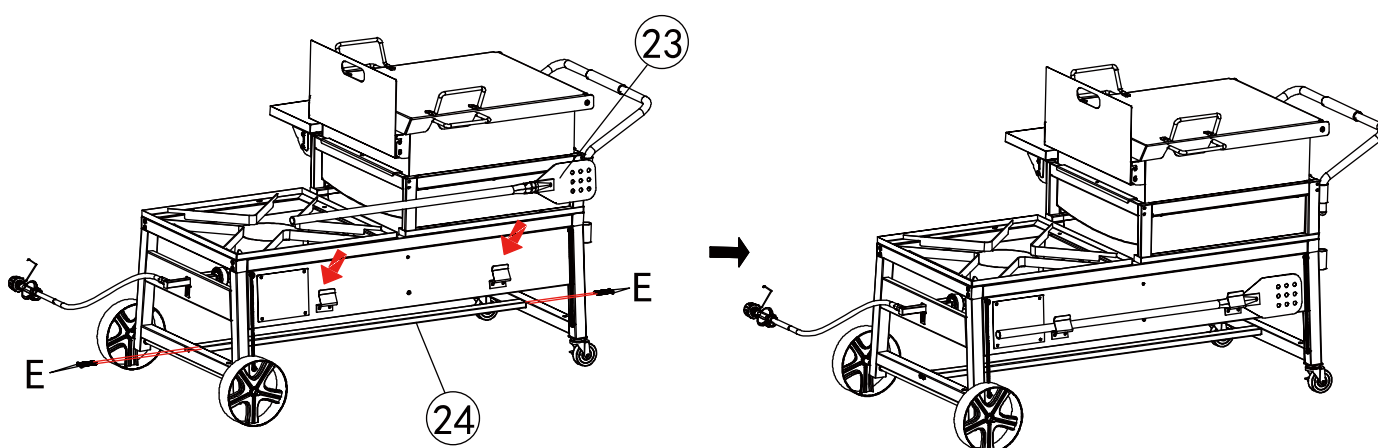
Install the divide panel (21) to the cart with 4 bolts (H) .

19 A   ×2

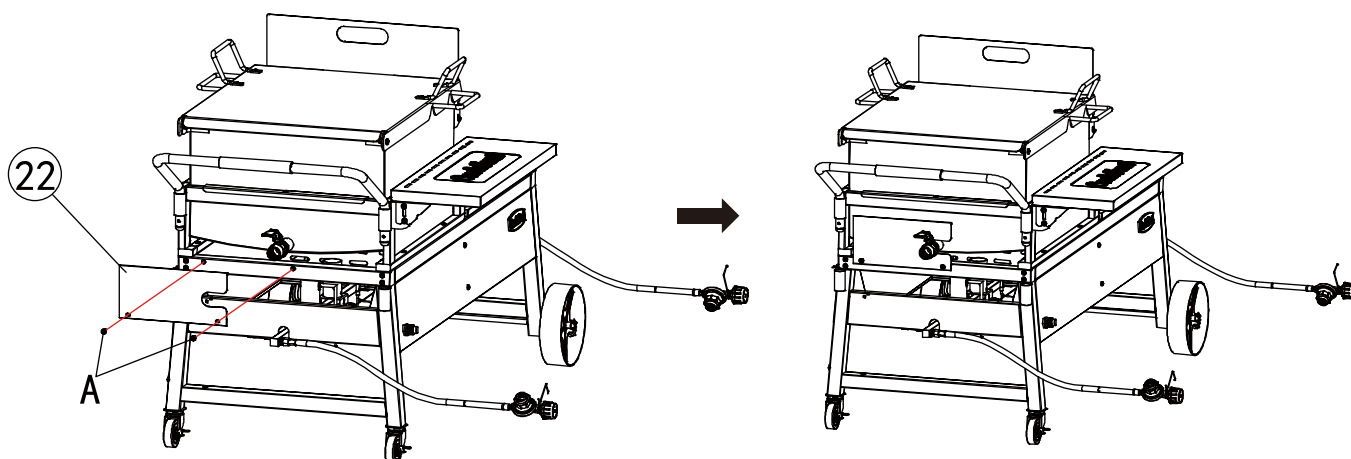

Install the heat plate (22) to the side cart with 2 bolts (A).

20 E  ×4



Slide the paddle (23) into the cart bottom slot storage.
Install the bottom beam (24) onto the cart with 4 bolts (E).